

## KS 4783 ED

Freestanding refrigerator

with DailyFresh and extra convenience for the perfect side-by-side combination.



- Spacious drawer with moisture control – DailyFresh
- Uniform temperature distribution inside the appliance – DynaCool
- Soft closing of the door with SoftClose
- Flexible refrigerator adaptation for tall containers – FlexiBoard
- Dishwasher-safe door shelves – ComfortClean

EAN: 4002516515777 / Material number: 11949580 /  
Old Material Number: 36478350AUS

<b>Appliance category</b>	
Refrigerator	•
<b>Construction type</b>	
Freestanding appliance	•
Door hinge	right
Convertible door hinging	•
Side-by-side enabled	•
<b>Design</b>	
Casing colour	Silver
Front colour	Stainless steel/CleanSteel
Refrigeration section lighting	LED
<b>User convenience</b>	
Networking with Miele@home	•
Freshness system	DailyFresh
ComfortClean	•
DynaCool	•
XL interior	•
SoftClose	•
Concealed door opener	EasyOpen lever handle
<b>Control system</b>	
Operating concept	SensorTouch
Precise adjustment	Fridge temperature
Independent temperature regulation of fridge and freezer zones	No
Automatic SuperCool	•
No. of temperature zones	1
Sabbath mode	•
Party mode	•
Holiday mode	•
<b>Fridge/Fridge section</b>	
No. of shelves	6
including number of split shelves (FlexiBoard)	1
Chrome-plated metal bottle rack	•
No. of crisper drawers	2
Number of inner door racks for tinned food	3
Door rack for bottles	2
Door shelves	5
<b>Safety</b>	
Lock function	•
Acoustic door alarm	•
Acoustic temperature alarm	•
Optical door alarm	•
<b>Technical data</b>	
Appliance width in mm	597
Appliance height in mm	1855
Appliance depth in mm	675
Weight in kg	71,8
Climate class	SN-T

KS 4783 ED

Freestanding refrigerator

with DailyFresh and extra convenience for the perfect side-by-side combination.



EAN: 4002516515777 / Material number: 11949580 /

Old Material Number: 36478350AUS

Total usable capacity in l	399
Current consumption (mA)	1200
Voltage in V	220-240
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50-60
Length of supply lead in m	2,0
Replacing lamps	Service


<b>Accessories included</b>	
-----------------------------	--

Egg tray	•
----------	---

## KS 4783 ED


Freestanding refrigerator

with DailyFresh and extra convenience for the perfect side-by-side combination.




KS4383ED N, KS4383DD N, Nordic, KS4783DD, KS4783ED, K4776ED, installation (footnote\*) (installation drawings)

\*1. View from the front, 2. Mains connection cable, L = 2000 mm

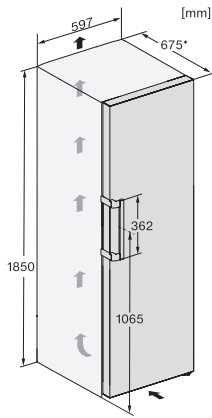


K4776ED, KS4783ED, FN4772E, installation sketch (footnote\*) (installation drawings)

\*To achieve the declared energy consumption, the spacers supplied with the unit must be used. This increases the depth of the unit by approx. 15 mm. The unit is fully functional without the use of the spacers, but has a slightly higher energy consumption.

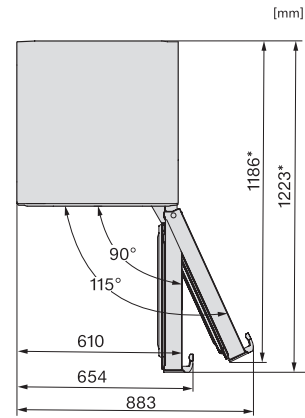


KFN4777CD, KFN4797DD, KFN4797CD, KFN4799DDE, KFN4795DD, KFN4795CD, KFN4795BD, top view (footnote\*)

\*To achieve the declared energy consumption, the spacers supplied with the unit must be used. This increases the depth of the unit by approx. 15 mm. The unit is fully functional without the use of the spacers, but has a slightly higher energy consumption.

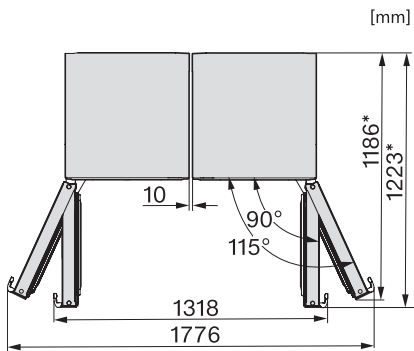


KS4783DD, KS4783ED, FNS4782E, FNS4782D, top view, Side-by-Side (\*footnote) (installation drawings)

\*To achieve the declared energy consumption, the spacers supplied with the unit must be used. This increases the depth of the unit by approx. 15 mm. The unit is fully functional without the use of the spacers, but has a slightly higher energy consumption.

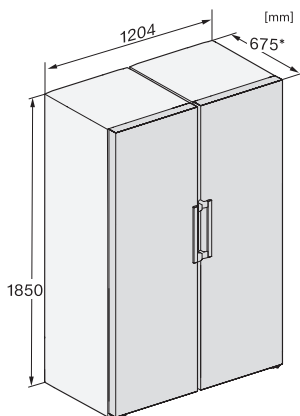

KS4783DD, KS4383ED, FNS4782E, FNS4782D, installation sketch, Side-by-Side (\*footnote) (installation drawings)

\*To achieve the declared energy consumption, the spacers supplied with the unit must be used. This increases the depth of the unit by approx. 15 mm. The unit is fully functional without the use of the spacers, but has a slightly higher energy consumption.

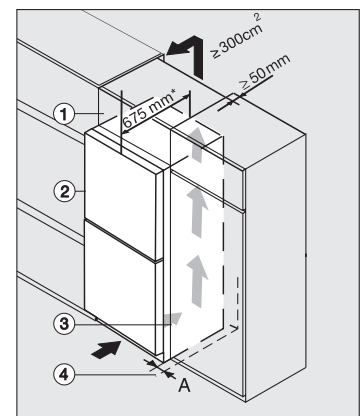

Integrating freestanding refrigeration appliance in a run of kitchen units, edt/cs, ws, bst, el (\*footnote)

1. Top box, 2. Refrigeration appliance, door depth = 75 mm, 3. Housing unit, 4. Wall, A = 25 mm (with recessed grip)/60 mm (with handle), \* The appliance depth is increased by approx. 15 mm for refrigeration appliances with wall spacers fitted.